


MAXXMAR WINDOW FASHIONS
 150 Bator Road, Toronto, Ontario M9M 1H1
 Tel: 416-742-6299 - Toll Free: 1-866-916-6299
 Fax: 416-742-1772
 www.maxxmar.com



MAXXMAR™ WINDOW FASHIONS

Solar Panel Instructions

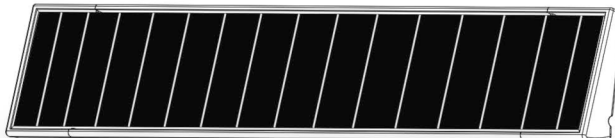


1. Installation


Notice:

- In order to obtain sufficient illumination, please install under direct sunlight.
- In order to prevent damage from foreign objects, please install under appropriate place.
- Please keep the solar panel away from the high PH environment to avoid corrosion.

I. Adhesive installation




① Take off the protective film on the back of the solar panel




② Installation up straight

II: Screw installation



① Put the screw and expansion pipe into the wall




② Make the solar panel upward placed, fix it on the installed screw.

III: Bracket installation




① Fix the bracket on the window or wall

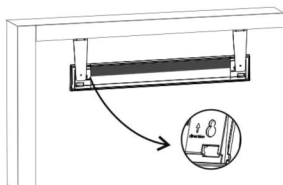



② Install the solar panel and fix with screws

2. Connection and application

Connection

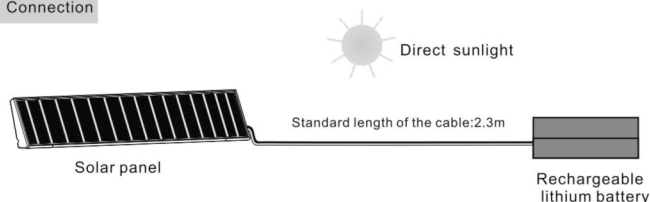

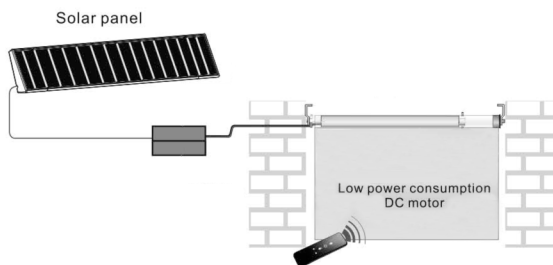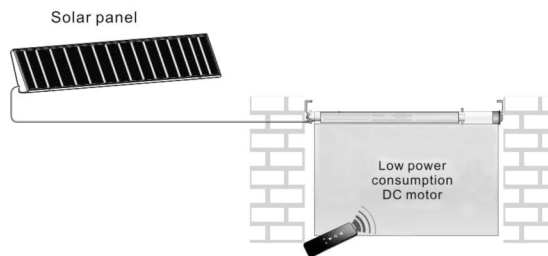











Low Power Consumption DC Motor



⚠ WARNING STRANGULATION HAZARD
 YOUNG CHILDREN CAN BE STRANGLED BY CORDS.
 IMMEDIATELY REMOVE THIS PRODUCT IF A CORD
 LONGER THAN 22 CM OR A LOOP EXCEEDING
 44 CM AROUND BECOMES ACCESSIBLE.

⚠ MISE EN GARDE RISQUE D'ÉTRANGLEMENT
 LES ENFANTS EN BAS ÂGE PEUVENT S'ÉTRANGLER AVEC DES
 CORDES. ENLEVEZ IMMÉDIATEMENT CE PRODUIT SI UNE CORDE
 MESURANT PLUS DE 22 CM DEVIENT ACCESSIBLE OU SI LE CONTOUR
 D'UNE BOUCLE DE PLUS DE 44 CM DEVIENT ACCESSIBLE.

Window Application Tables and Guides

Window Type					Avoid		
	SINGLE OR DOUBLE PANE OK	LIGHT TRANSMISSION 65% OR GREATER	WINDOW TINTING	INSIDE WINDOW ONLY		AWNINGS OR DEEP ROOF EAVES	WINDOW DIVIDERS OVERLAPPING SOLAR PANEL
Moving Window					Avoid		
	FIXED WINDOW	DOUBLE HUNG	SLIDING	CASEMENT		VEGETATION BLOCKING LIGHT	BUG SCREENS
Concern	Clean Install	Caution: Avoid Panel Collision	Caution: Avoid Panel Collision	Caution: Panel Movement Will tug or tear Harness	Note: No Film or Tint on the Window		
Suggestions		Limit Screw in track	Limit Screw in Track	Cable tie near corner			

Note

10,000 Lux are required to trickle charge the motor. Solar Panels should not be used on north facing windows nor in areas where you do not have a least **6 hours** of direct sunlight per day.